


COMPRESSED AIR CYCLONE WATER SEPARATOR (ECWS) SPECS

MODEL	Air Flow		Air In/out Connection	WORKING TEMP.		WORKING PRES.		Dimensions	
	M3/H	Lt / Min		MAX.	MIN.	MAX.	MIN.	Q (mm)	H (mm)
ECWS015	100	1,667	1/2"	80 C°	2 C°	16 Bar	2 Bar	95	275
ECWS020	200	3,333	3/4"	80 C°	2 C°	16 Bar	2 Bar	95	275
ECWS050	300	5,000	1"	80 C°	2 C°	16 Bar	2 Bar	120	310
ECWS100	600	10,000	1 1/2"	80 C°	2 C°	16 Bar	2 Bar	120	410
ECWS200	1200	20,000	2"	80 C°	2 C°	16 Bar	2 Bar	175	550
ECWS300	1800	30,000	3"	80 C°	2 C°	16 Bar	2 Bar	210	635
ECWS500	3000	50,000	3"	80 C°	2 C°	16 Bar	2 Bar	210	795

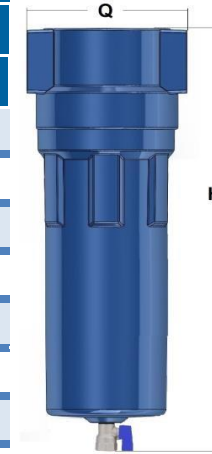

CORRECTION FACT.	0,5	0,72	0,87	1	1,06	1,12	1,22	1,32	1,44
BAR	1	3	5	7	8	9	11	13	15
PSI	15	44	73	100	116	131	160	189	218

Nominal Pressure Drop	0.04 Bar
-----------------------	----------